

## Product Guidance




### Altrix 36 Degree Ridge Beam

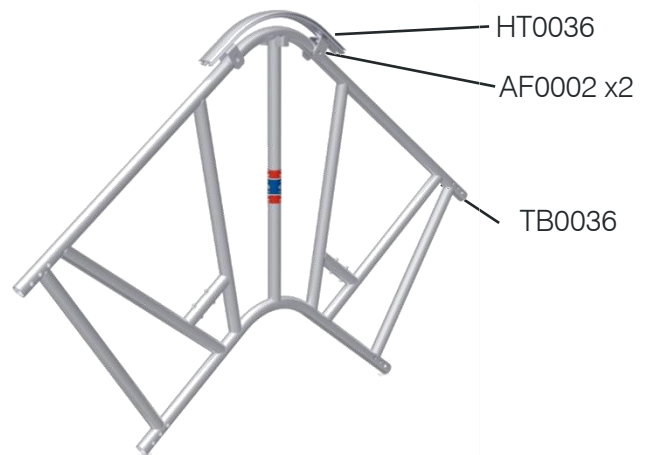
PDG16013-

#### Description

DESSA's new all aluminium 36 degree ridge beam for the Altrix range significantly extends the versatility, capacity and utilisation of the Altrix Roof System. This versatile beam offers a wealth of possibilities when providing your weather protection solution. The beam can be used at the apex to provide a steeper angled roof, along with added function of being utilised at the eaves of an 18 degree pitch, enabling connection to sidewalls to form shelter configurations. Complimenting this beam is also a bespoke fitting sheet track, which mounts to the top chord and enables regular sheet tracking lengths to be connected to it. Using the 36 degree ridge can significantly reduce the amount of support scaffolding required when installing temporary roofs over existing steep roof pitches.

#### Key Benefits

- Completely usable with existing AUK beam range.
- Versatile, for use in a variety of applications:-
  - 1) At eaves to enable sheets to be dressed vertical with no gaps. 
  - 2) At eaves to form modular shelters and buildings. 
  - 3) At ridge to overcome steep inclines and save scaffold heights. 
- Brace connection location positioned to allow for continuation of 1m c/c on beam line.
- Short ridge track TT0036 allows for additional horizontal brace to be positioned on top chord of ridge beam.



#### Technical Information

Product Code:	TB0036
Description:	Altrix 36 Degree Ridge Beam
Product Weight:	13.39kg
Product Code:	TT0036
Description:	Altrix 36 Degree Ridge Track
Product Weight:	1.89kg