


TECHNICAL INFORMATION

BRACE FRAMES


TIS17006-

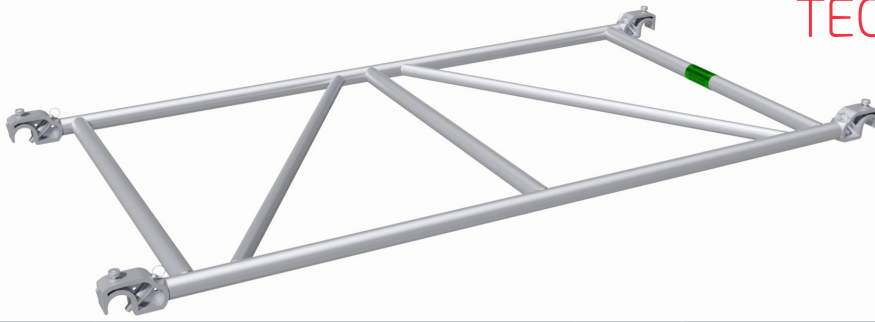


ARTICLE	IMAGE	DESCRIPTION	WEIGHT (kg)	BRACE LENGTH (m)	PERMISSIBLE LOADINGS			
					POINT LOAD "P" (kN)	UDL "w" (kN/m)	*TENSION "T" (kN)	BUCKLING "N" (kN)
UK1000		UNI Frame 1mx1m	7.80	1.0	5.69	11.38	23.20	53.88
UK1500		UNI Frame 1.5mx1m	8.94	1.5	3.79	5.06	23.20	53.88
UK1572		UNI Frame 1.57mx1m	9.09	1.572	3.62	4.61	23.20	53.88
UK2000		UNI Frame 2mx1m	11.08	2.0	2.85	2.85	23.20	53.88
UK2072		UNI Frame 2.07mx1m	11.22	2.072	2.75	2.65	23.20	53.88
UK2500		UNI Frame 2.5mx1m	12.30	2.5	2.28	1.82	23.20	53.88
UK2572		UNI Frame 2.57mx1m	12.47	2.572	2.21	1.72	23.20	53.88
UK3000		UNI Frame 3mx1m	13.61	3.0	1.90	1.26	23.20	53.88
UK3072		UNI Frame 3.07mx1m	13.76	3.072	1.85	1.21	23.20	53.88

*LIMITED BY CLAW TENSION FAILURE

FORCES APPLIED

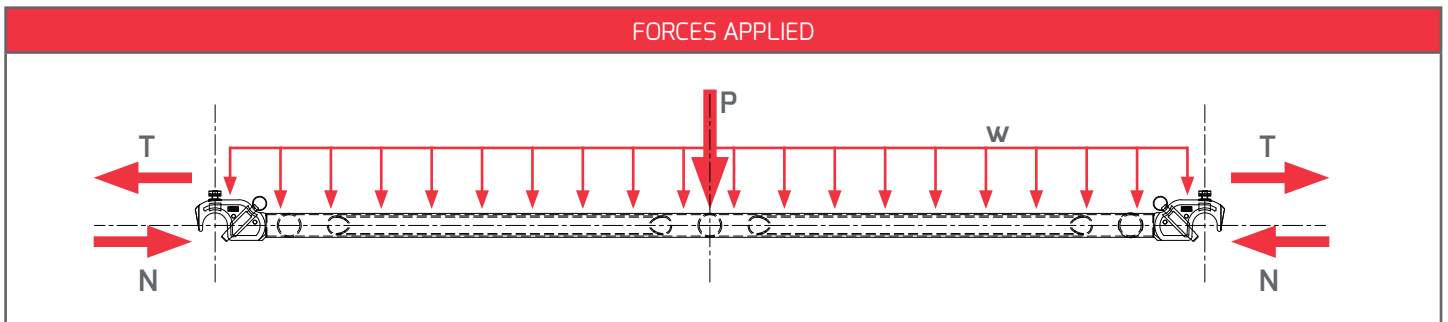

CROSS SECTIONAL PROPERTIES

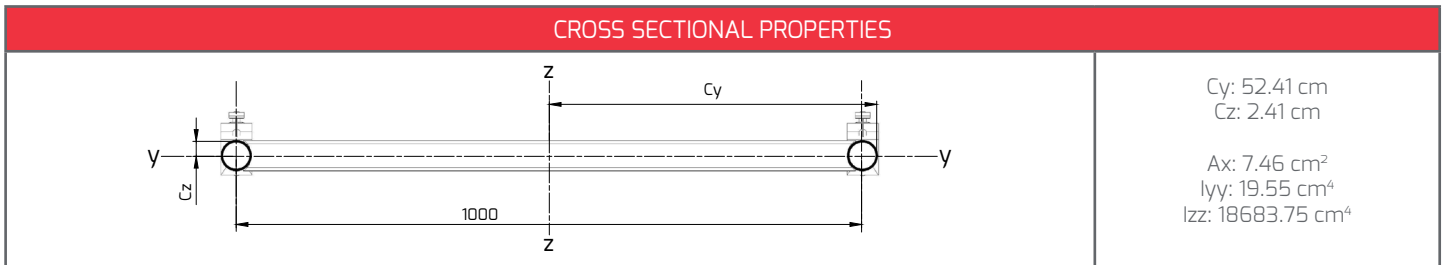

The information provided is based on prevailing legislation and/or testing. DESSA Ltd reserves the right to make technical changes, users should ensure that only current revisions of this Technical Information Sheet are used. The published data refers to original genuine DESSA materials only. © DESSA Limited. No unauthorised use, copy or disclosure is to be made.