


TECHNICAL INFORMATION

SHEET TENSION BAR

TIS17039-

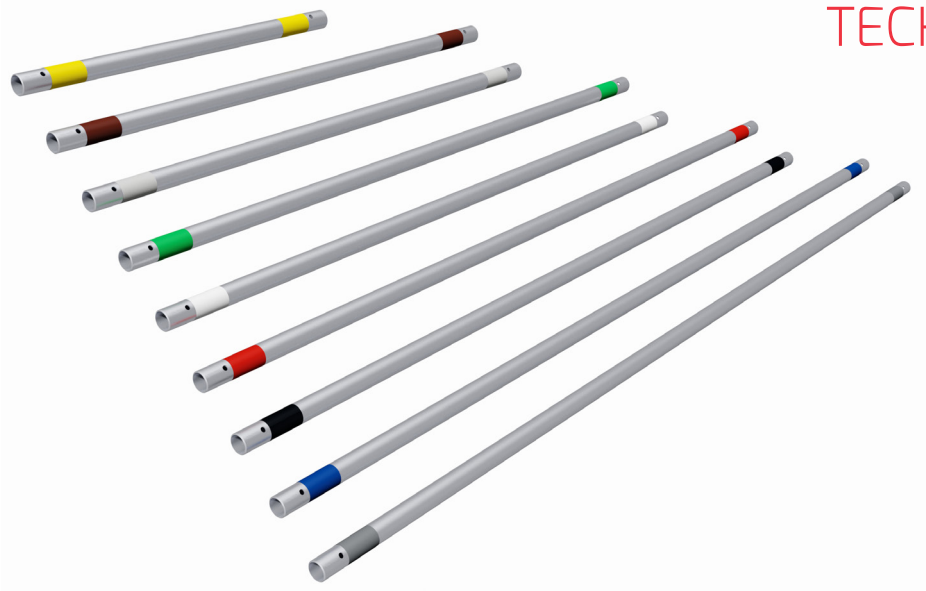

ARTICLE	COLOUR	WEIGHT (kg)	LENGTH (MM)	MATERIAL GRADE	SURFACE FINISH
UB1000	Yellow	3.38	908	EN 10027 : S235	HOT DIP GALVANIZED
UB1500	Brown	5.25	1410		
UB1572	Grey	5.68	1482		
UB2000	Green	7.12	1910		
UB2072	White	7.39	1982		
UB2500	Red	8.96	2410		
UB2572	Black	9.26	2482		
UB3000	Blue	10.86	2910		
UB3072	Grey	11.13	2982		

PRODUCT DIMENSIONS	SECTION	SECTION PROPERTIES
<p>DESSA TRACE STAMP</p> <p>Ø12</p>	<p>Ø48.3</p> <p>3.2</p> <p>A</p>	<p>A</p> <p>A: 4.53 cm² Cz, Cy: 2.41 cm Izz, Iyy: 11.58 cm⁴</p>

LOADING	PERMISSIBLE LOAD
Bending	1.12 kNm
Shear	29.2 kN

USED WITH
SHEET INSTALLATION, UA0026 + UA0027 - CONTINUOUS TUBE CONNECTORS

The information provided is based on prevailing legislation and/or testing. DESSA Ltd reserves the right to make technical changes, users should ensure that only current revisions of this Technical Information Sheet are used. The published data refers to original genuine DESSA materials only. © DESSA Limited. No unauthorised use, copy or disclosure is to be made.